OIPE JC61
NOV 19 2004
PATENT & TRADEMARK OFFICE

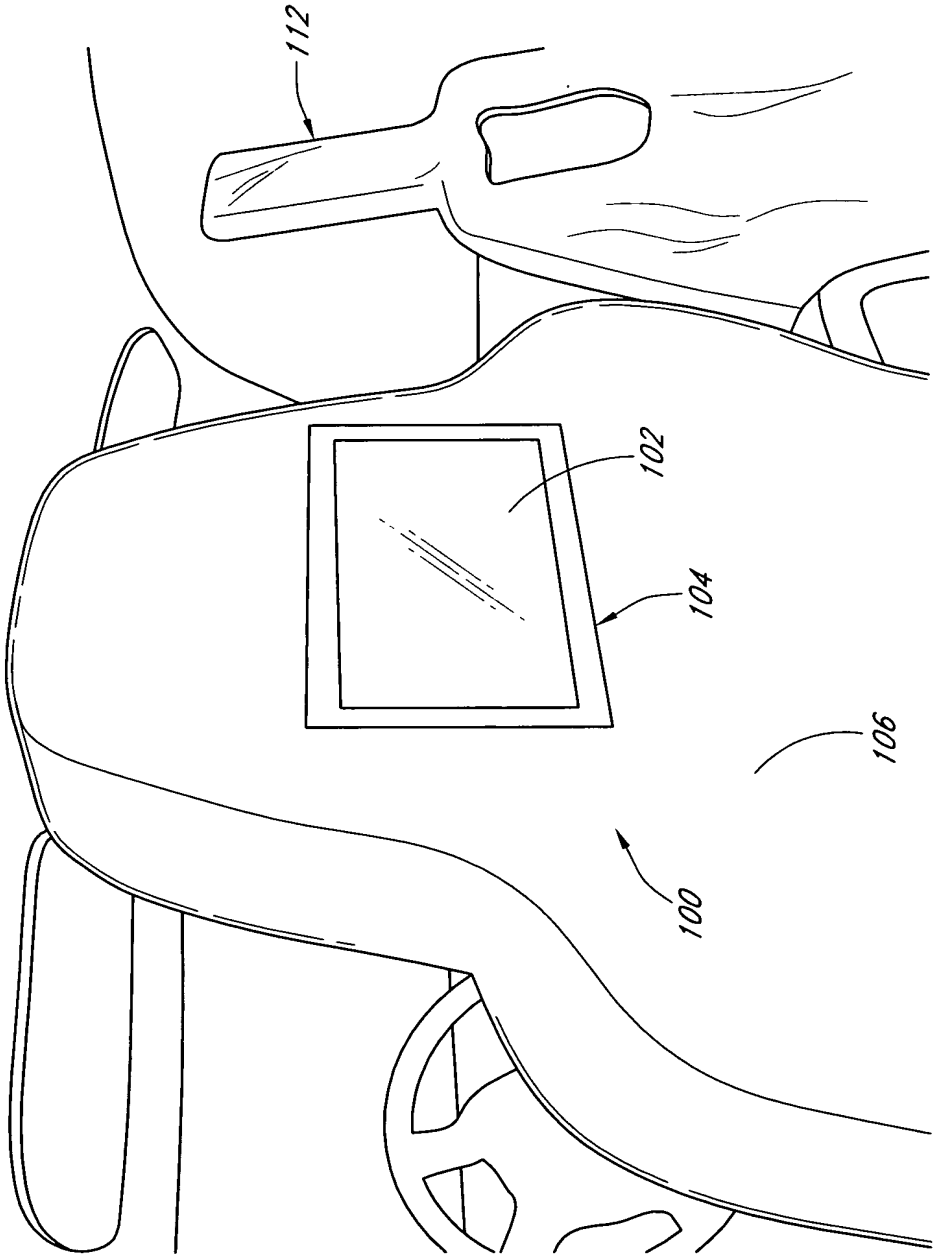

FIG. 1A

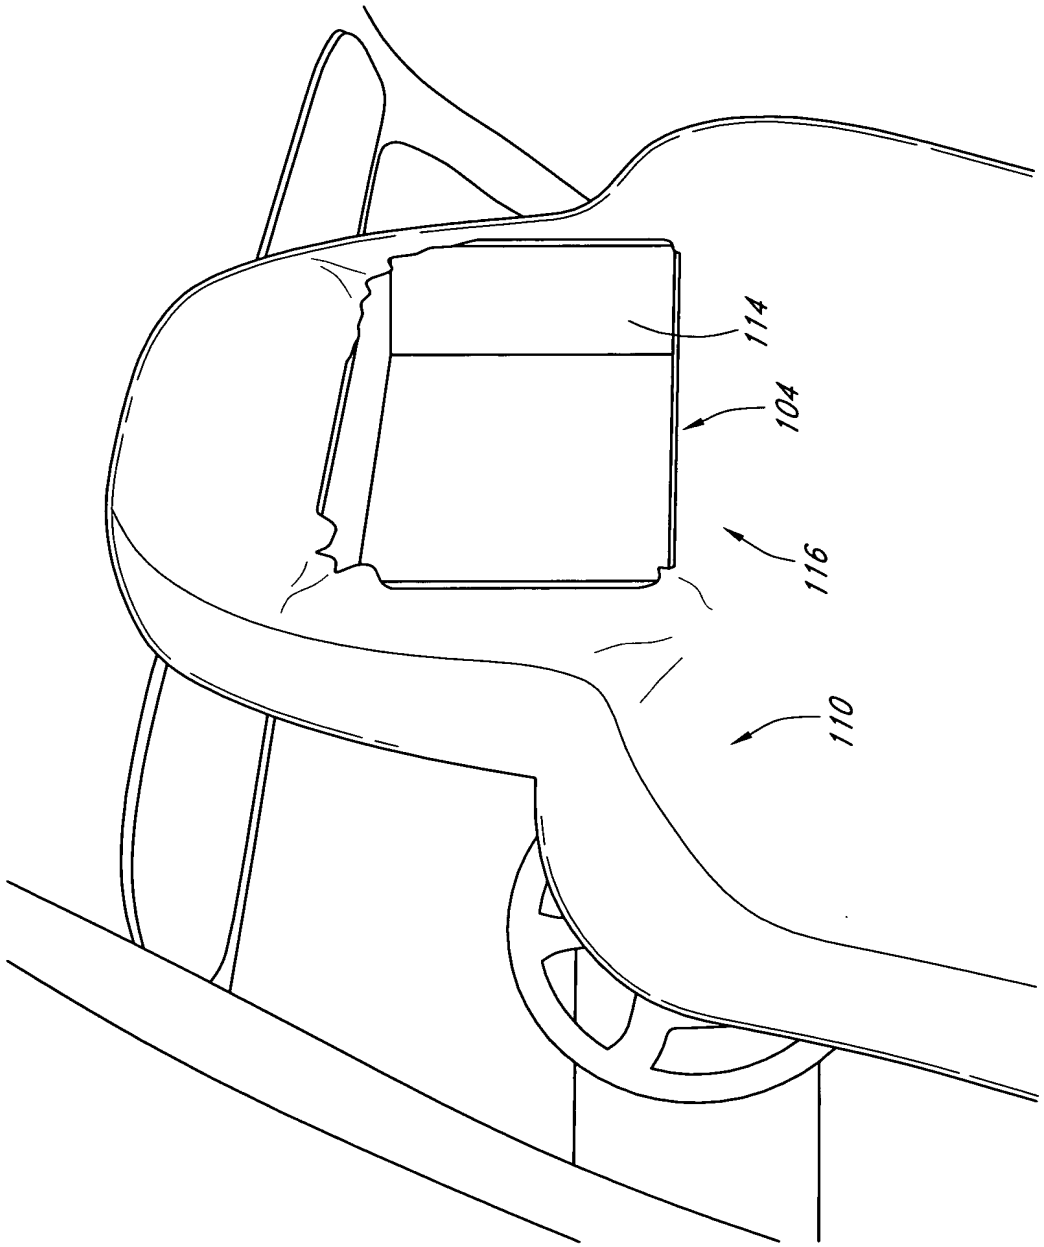

FIG. 1B

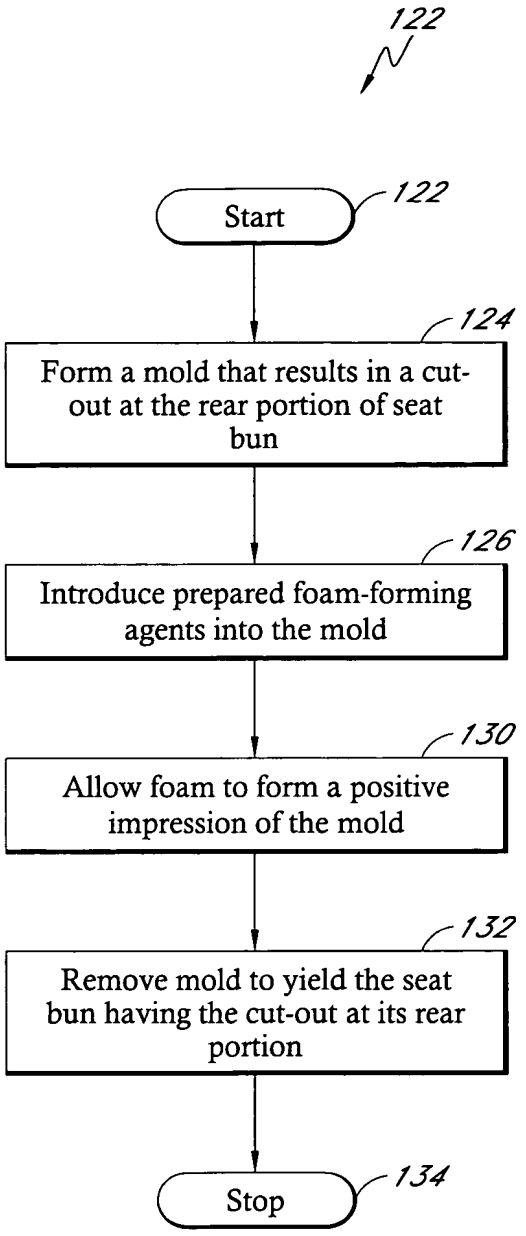
122
Start
122
124
Form a mold that results in a cut-out at the rear portion of seat bun
126
Introduce prepared foam-forming agents into the mold
130
Allow foam to form a positive impression of the mold
132
Remove mold to yield the seat bun having the cut-out at its rear portion
Stop
134

FIG. 2A

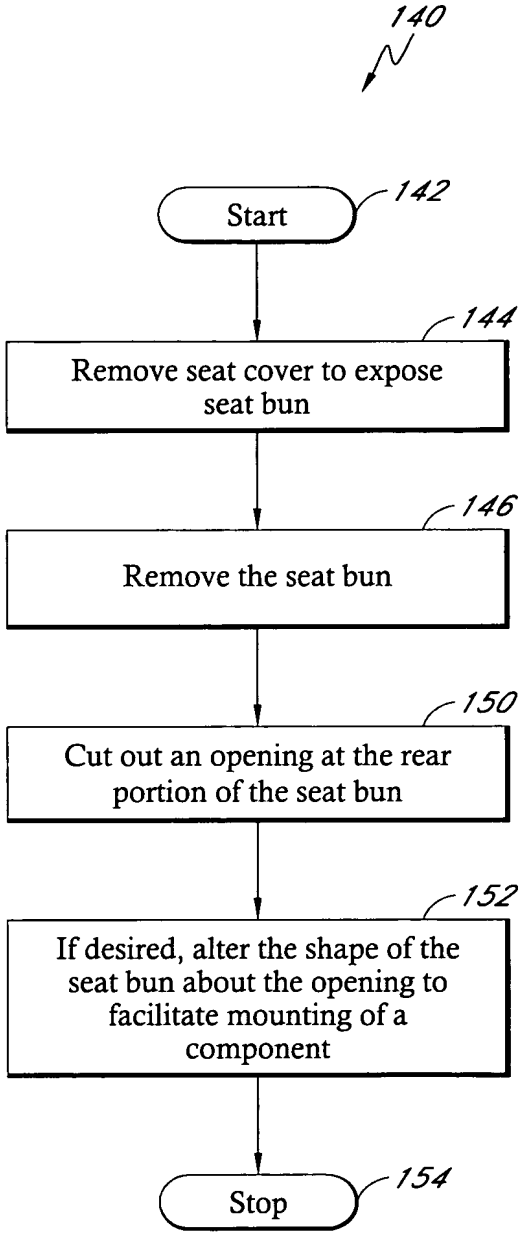
140
Start
142
144
Remove seat cover to expose seat bun
146
Remove the seat bun
150
Cut out an opening at the rear portion of the seat bun
152
If desired, alter the shape of the seat bun about the opening to facilitate mounting of a component
Stop
154

FIG. 2B

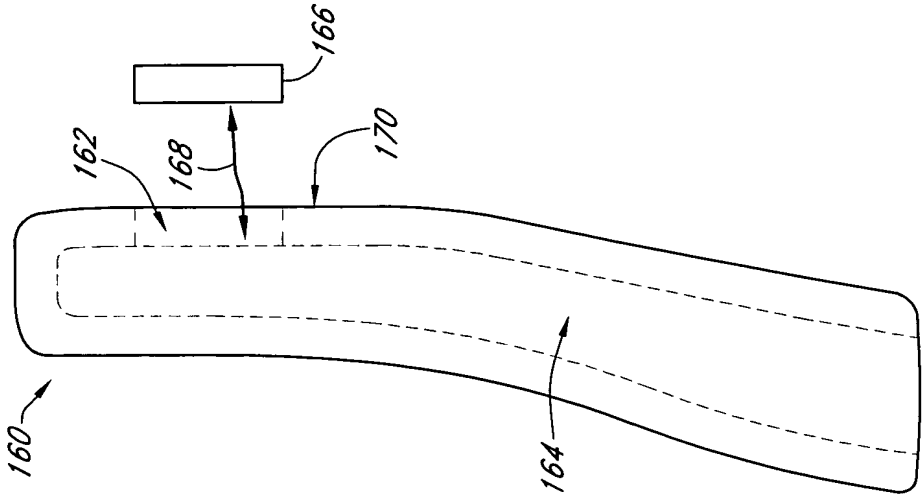

FIG. 3B

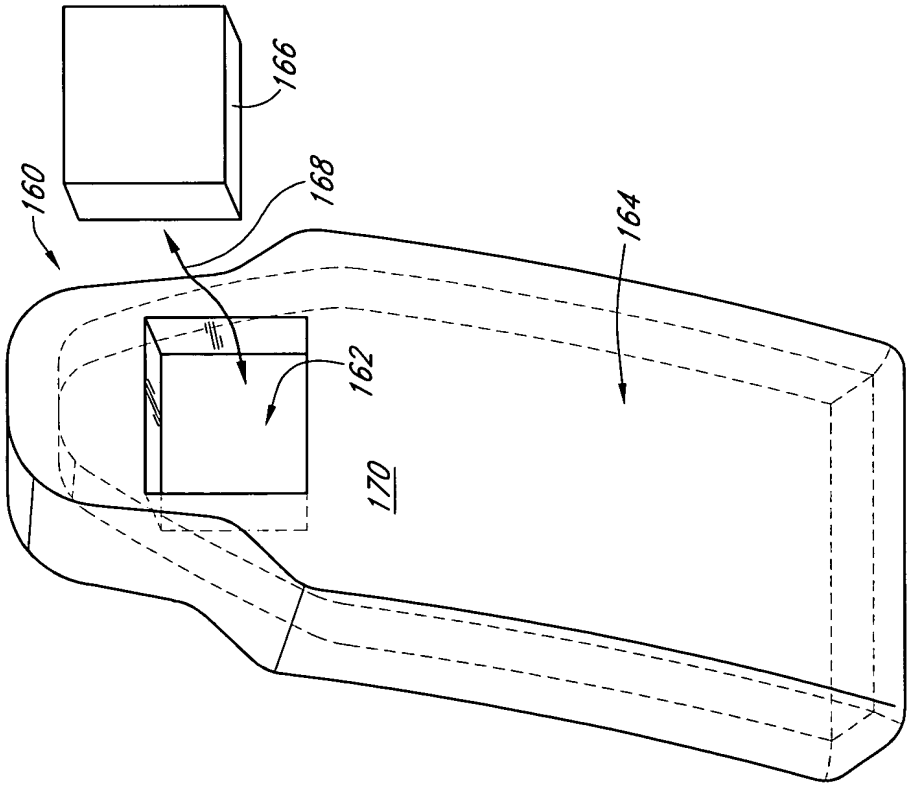

FIG. 3A

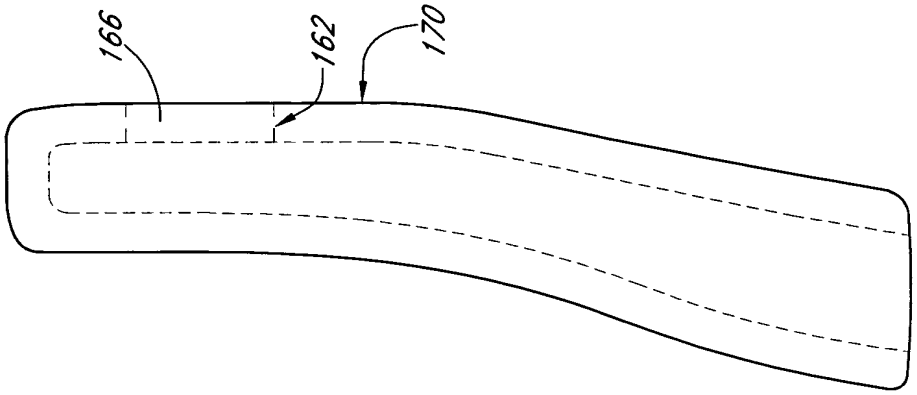

FIG. 4B

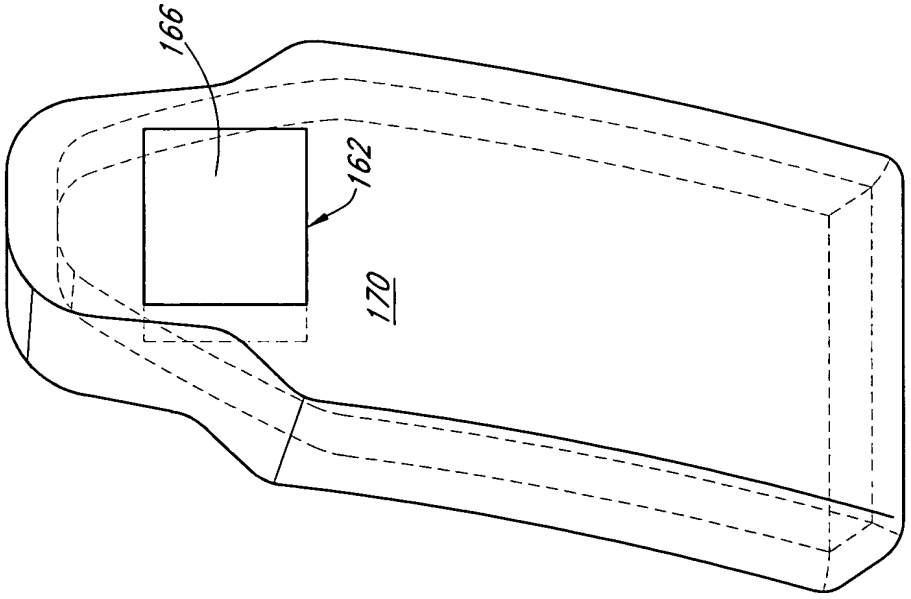

FIG. 4A

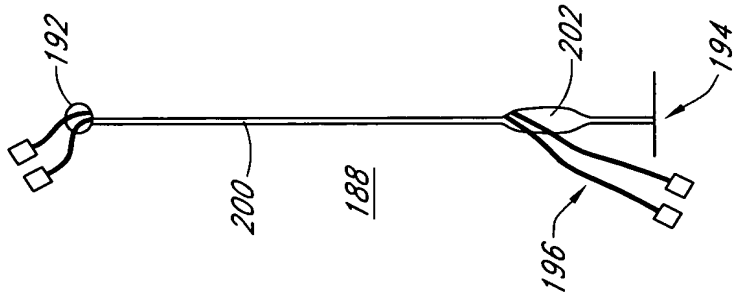
192
202
194
200
188
196

FIG. 5B

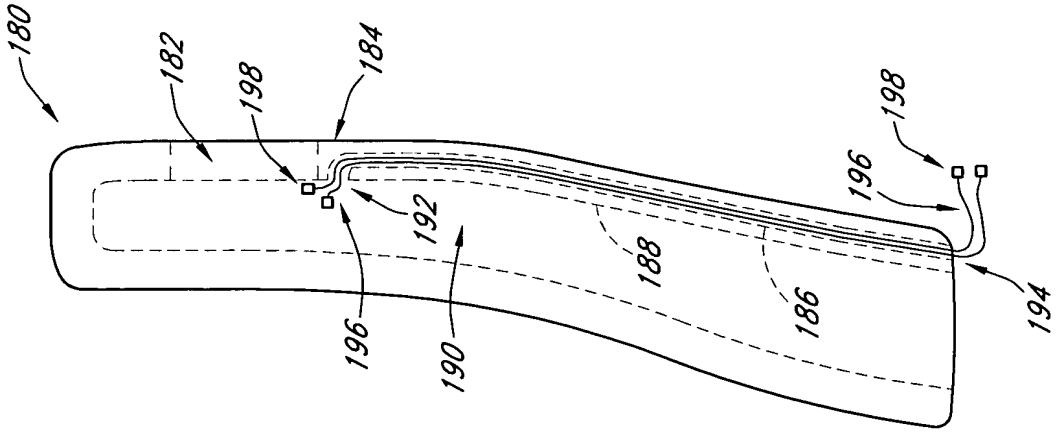
180
182
198
184
198
196
192
188
186
196
190
194

FIG. 5A

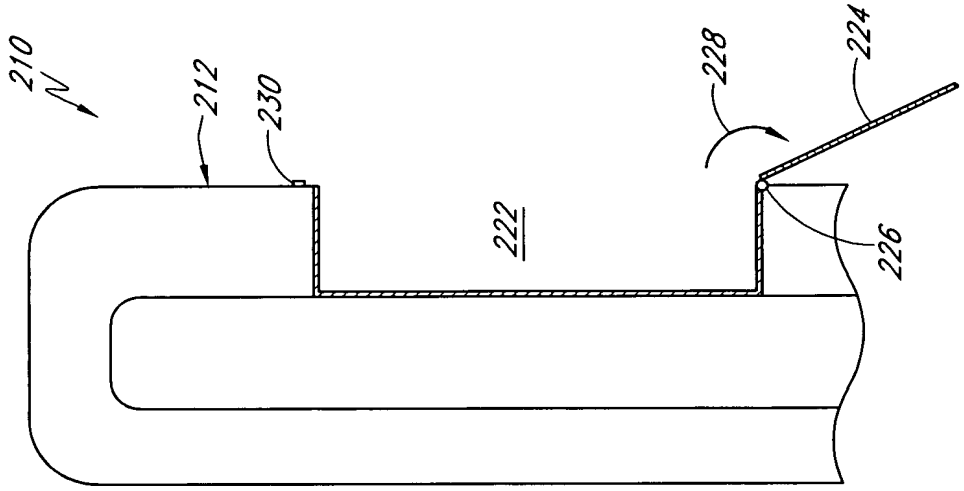

FIG. 6B

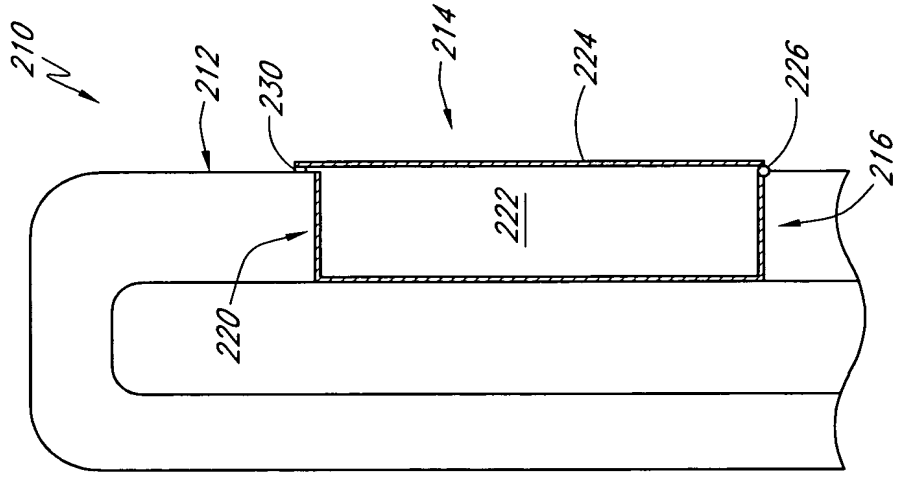

FIG. 6A

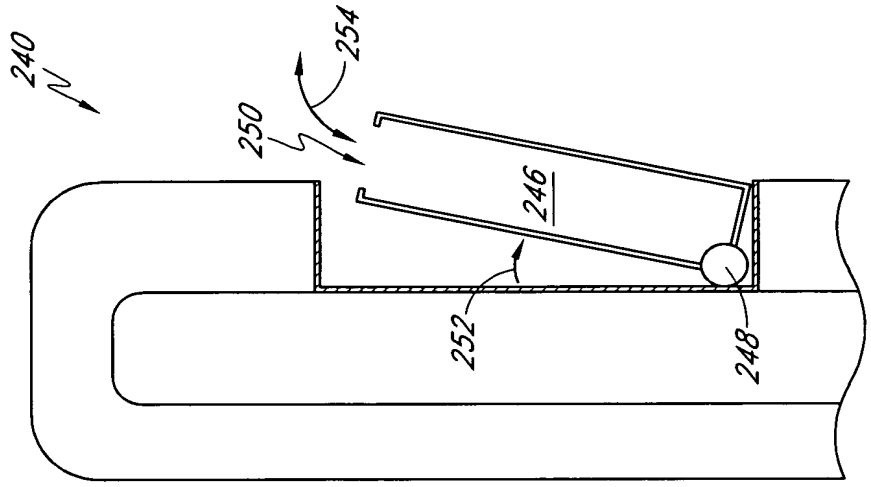

FIG. 7B

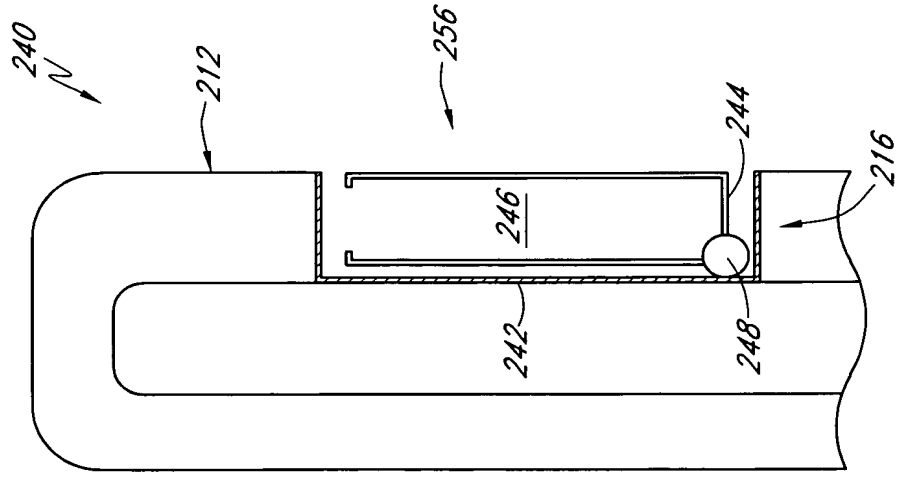

FIG. 7A

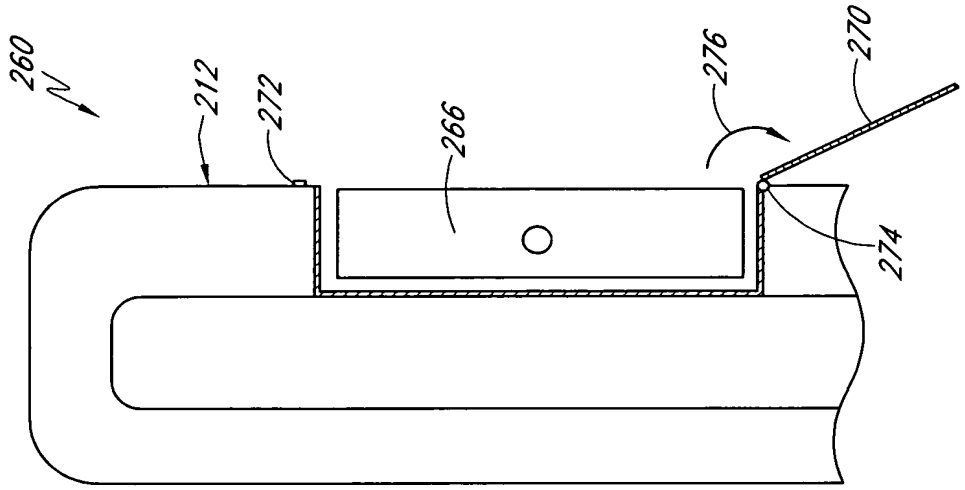
260
212
272
266
276
270
274

FIG. 8B

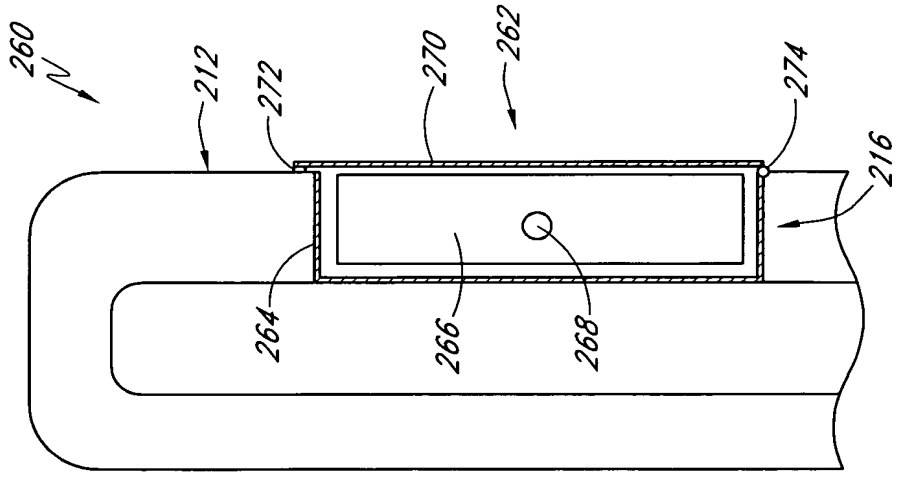
260
212
272
270
262
274
216
264
266
268

FIG. 8A

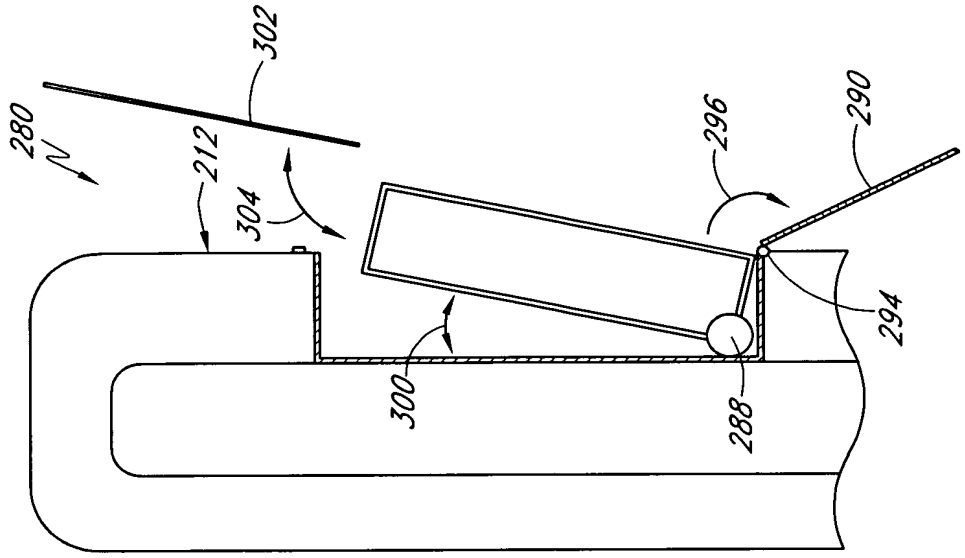
302
280
212
304
296
290
294
300
288

FIG. 9B

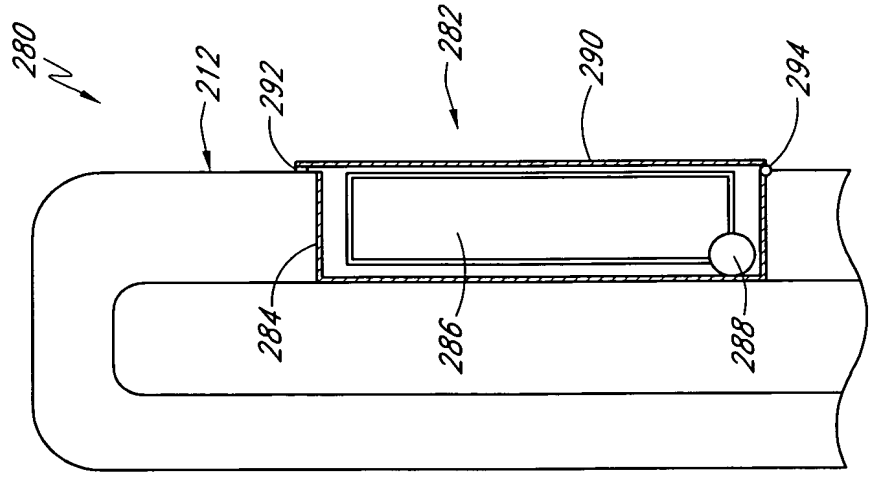
280
212
292
282
290
294
284
286
288

FIG. 9A

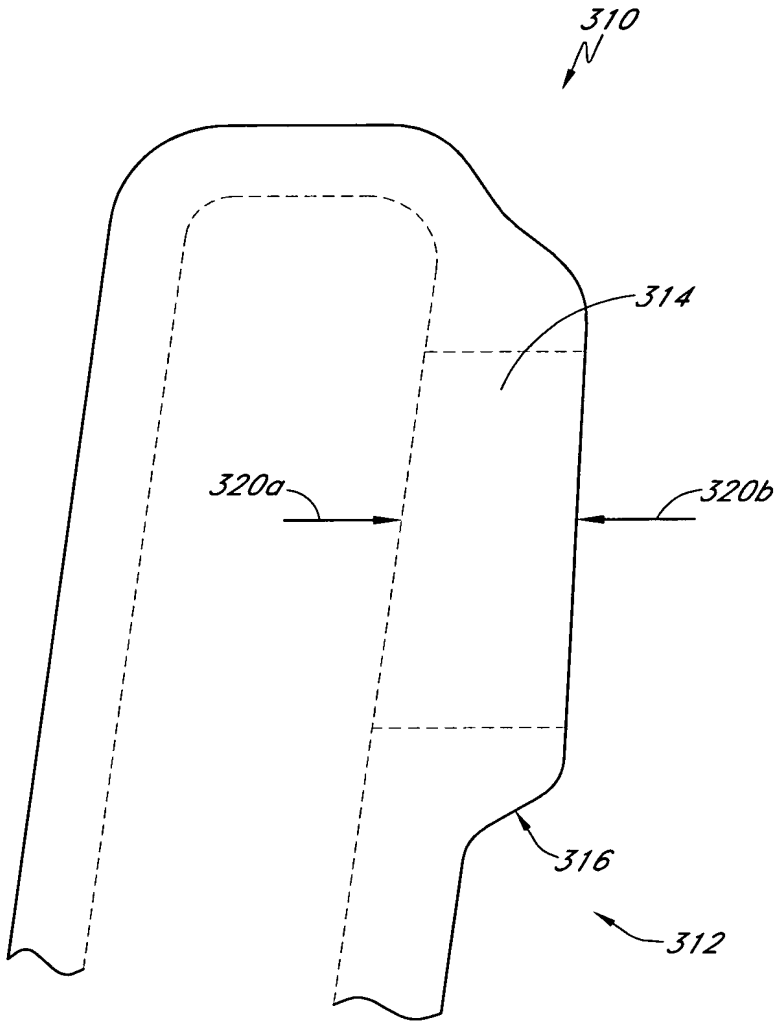

FIG. 10

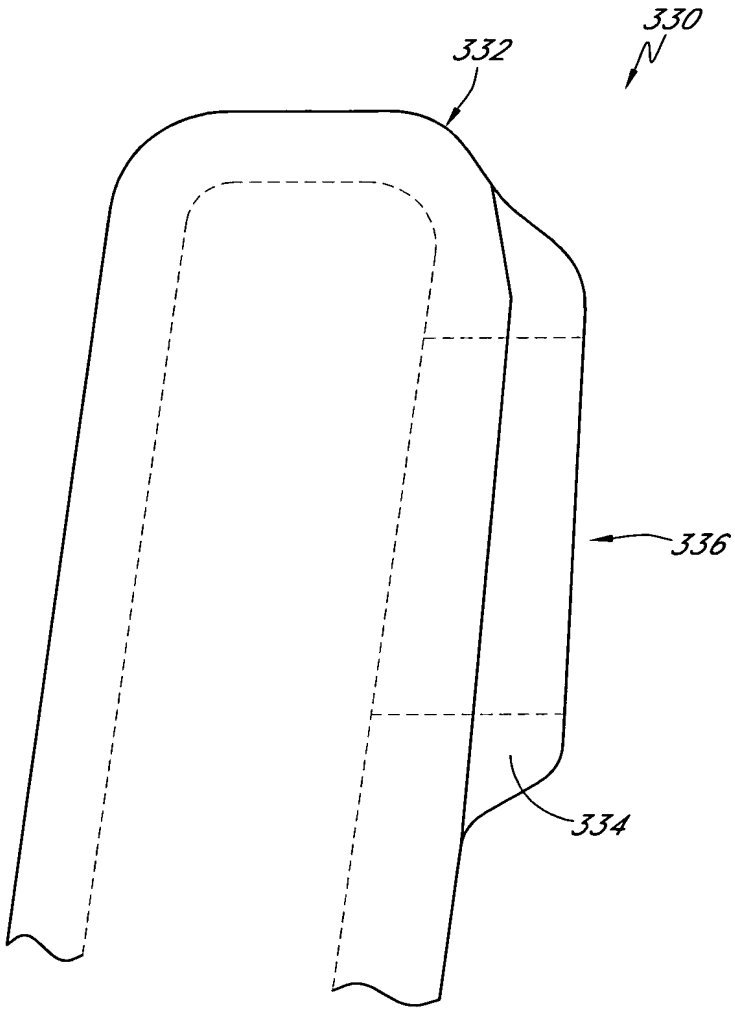

FIG. 11

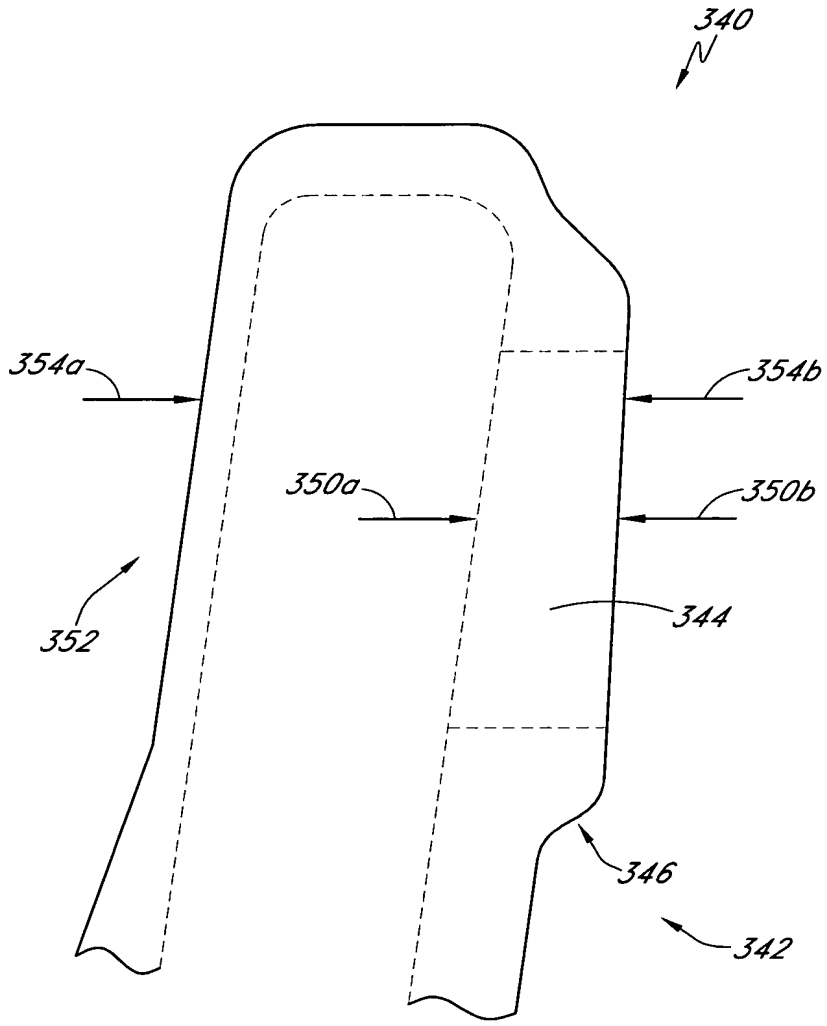

FIG. 12